

PRFAB INDIA


Available **Teracotta** wall tiles:
(As of 24Nov 2022)



Name: Plain
SKU: PRCL-T100
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.



Name: Dotted
SKU: PRCL-T101
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.

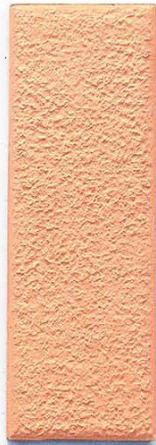

Name: Rustic
SKU: PRCL-T102
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.



Name: Grasse
SKU: PRCL-T103
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.




Name: Cubic
SKU: PRCL-T104
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.



Name: Wooden
SKU: PRCL-T105
Size: 230*80mm (9"x3")
(Thick. 10mm)
Coverage: 5 pcs/sq.ft.



Name: Plain
SKU: PRCL-T200
Size: 230*65mm (9"x2.5")
(Thick. 10mm)
Coverage: 6 pcs/sq.ft.

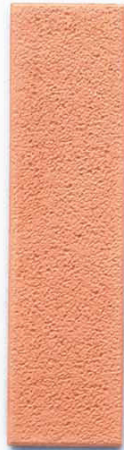

Name: Rough
SKU: PRCL-T201
Size: 230x65mm (9"x2.5")
(Thick. 10mm)
Coverage: 6 pcs/sq.ft.




Name: Oakino
SKU: PRCL-T202
Size: 230x65mm (9"x2.5")
(Thick. 10mm)
Coverage: 6 pcs/sq.ft.



Name: Emboss
SKU: PRCL-T203
Size: 230x65mm (9"x2.5")
(Thick. 10mm)
Coverage: 6 pcs/sq.ft.

Features:



Easy
Installation



Low
Maintenance



All Weather
Resistance



Fungus
Free



Design
Flexibility



100%
Asbestos Free




Termite
Free



Fire
Resistance



Cost &
Time Saving

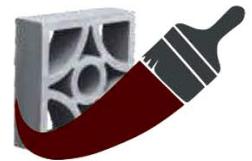

PAINTABLE




Concrete, GFRC & Teracotta: GRC Façade & Fenestration | Breeze blocks | Terracotta Wall tiles

www.prefabb.in


info@prefabb.in & prefabb.in@gmail.com | **instagram: prefabb_gfrc & encoarstudio**
+91-9991668898 & +91-9737370669 | Gujarat, India.

PREFABBINDIA


Available **Terracotta** breeze blocks:
(As of April 2023)




Inigma Jaali
PRBR-T01
8.5x8.5x2.4" | 0.5sqft/pc




Rexo Jaali
PRBR-T02
8.5x8.5x2.4" | 0.5sqft/pc




Vivo Jaali
PRBR-T03
8.5x8.5x2.4" | 0.5sqft/pc




Screen Jaali
PRBR-T04
8.5x8.5x2.4" | 0.5sqft/pc




Panama Jaali
PRBR-T05
8.5x8.5x2.4" | 0.5sqft/pc




Kores Jaali
PRBR-T06
8.5x8.5x2.4" | 0.5sqft/pc




Flower Jaali
PRBR-T07
8.5x8.5x2.4" | 0.5sqft/pc




Zebra Jaali
PRBR-T08
8.5x8.5x2.4" | 0.5sqft/pc




Window Jaali
PRBR-T09
8.5x8.5x2.4" | 0.5sqft/pc




Slice Jaali
PRBR-T10
8.5x8.5x2.4" | 0.5sqft/pc




Lotus Jaali
PRBR-T11
8.5x8.5x2.4" | 0.5sqft/pc




Cubic Jaali
PRBR-T12
8.5x8.5x2.4" | 0.5sqft/pc



Lily Jaali
PRBR-T13
8.5x8.5x2.4" | 0.5sqft/pc



Arrow Jaali
PRBR-T14
8.5x8.5x2.4" | 0.5sqft/pc

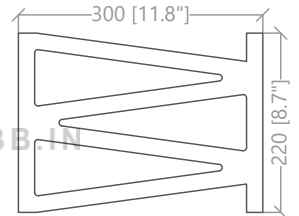

W Jaali
PRBR-T51
300x220x80mm | 0.71sqft/pc

Actual product image:



Features:



Natural Sunlight



Natural Ventilation



Easy Installation



Low Maintenance



All Weather Resistance



Fungus Free



Design Flexibility



100% Asbestos Free



Termite Free




Fire Resistance



Cost & Time Saving



20 Year Durability



PAINTABLE



100% ECO FRIENDLY



Concrete, GFRC & Terracotta: GRC Façade & Fenestration | Breeze blocks | Terracotta Wall tiles

www.prefabb.in

prefabb.in@gmail.com | [instagram: prefabb_gfrc](https://www.instagram.com/prefabb_gfrc) & [encoarstudio](https://www.instagram.com/encoarstudio)

+91-9991668898 & +91-9737370669 | Gujarat, India.

PREFAB INDIA

Available **Concrete Venti-breeze block**:
(As of January 2023)



Leaf
PRBR-C01
200x200x70mm | 0.43sqft/pc



Window-4
PRBR-C02
200x200x70mm | 0.43sqft/pc



Blend
PRBR-C03
200x200x70mm | 0.43sqft/pc



Cube
PRBR-C04
200x200x70mm | 0.43sqft/pc



Cover
PRBR-C05
200x200x70mm | 0.43sqft/pc



Flower
PRBR-C06
200x200x70mm | 0.43sqft/pc



Four-Y
PRBR-C07
200x200x70mm | 0.43sqft/pc



Raman-1
PRBR-C08
200x200x70mm | 0.43sqft/pc



Diamond
PRBR-C09
200x200x70mm | 0.43sqft/pc



Star
PRBR-C10
200x200x70mm | 0.43sqft/pc



One-Y
PRBR-C11
200x200x70mm | 0.43sqft/pc



Maze-w
PRBR-C12
200x200x70mm | 0.43sqft/pc



Triangle
PRBR-C13
200x200x70mm | 0.43sqft/pc



Maze-4
PRBR-C14
200x200x70mm | 0.43sqft/pc



Lace
PRBR-C15
200x200x70mm | 0.43sqft/pc



Space
PRBR-C16
200x200x70mm | 0.43sqft/pc



Window
PRBR-C17
200x200x70mm | 0.43sqft/pc



Sunrise
PRBR-C18
200x200x70mm | 0.43sqft/pc



Mountain
PRBR-C19
200x200x70mm | 0.43sqft/pc



Ball
PRBR-C20
200x200x70mm | 0.43sqft/pc



Mountain-2
PRBR-C21
200x200x70mm | 0.43sqft/pc



Taly
PRBR-C22
200x200x70mm | 0.43sqft/pc



Lamp
PRBR-C23
200x200x70mm | 0.43sqft/pc



Sea foam
PRBR-C24
200x200x70mm | 0.43sqft/pc



Floral
PRBR-C25
200x200x70mm | 0.43sqft/pc



Features:

- Made in India blocks.
- Best in class finish. Never ever seen quality in indian marker.
- Double sided finish.
- Deeper grooves on all four sides for stronger installations.
- Custom design & sizes available with MOQ. 5000pcs.



Concrete, GFRC & Teracotta: GRC Façade & Fenestration | Breeze blocks | Terracotta Wall tiles

www.prefabb.in

info@prefabb.in & prefabb.in@gmail.com | **instagram: prefabb_gfrc & encoarstudio**
+91-9991668898 & +91-9737370669 | Gujarat, India.

INSTALLATION GUIDE FOR CONCRETE BLOCKS

1. Preparing the installation site:

- Do not install the breeze block on the smooth and fragile bases such as ceramics, mosaic, tiles.

2. Preparing the mortar mixture:

- Option 1: Using the normal mortar mixture which is the same to install other building materials like bricks, blocks. We recommend using the white cement for the mortar.
- Option 2: Using the special ready mix mortar or cement adhesive for wall and following up the instruction of mortar manufacturer

Notes: The mortar mixture must be dry enough (not too wet), and choose the mortar grade on the request of the project.

3. Watering, curing the breeze cement blocks

- Watering the breeze blocks before installation is important.
- Watering the finish wall after installation within 5 consecutive days (4 times per day).
- These steps are very important which effected directly to the wall quality later.

4. Preparing the installation space:

- Measuring the height and width of the estimated wall.
- Equally divided the distance of the blocks.
- Using the specialized tools to make sure the perpendicular of the wall on the ground surface.

5. Installation:

- Starting the first block from the bottom corner
- Applying the 10mm mortar layer on each top and side faces of the block and lay they fix into the correct positions.
- Using the trowel to float the mortar joints. Getting all the redundant parts out to get the nice joint looking.
- The best joints are in between 5-10mm. It can be flexible changed but less than 20mm for the installation areas of over 2.5 meter height x 3 meter width
- Using the normal tile cutting machine (same as cutting machine for encaustic cement tile, ceramic tile) if needed.
- If the wall is over 2.5 meter height, it should be locked by the 3-5cm concrete beam.
- If the wall is over 4 meter width, it should be locked by the concrete or brick pillar
- The anchorages should be used for the installation of the big walls.
- Water based acrylic paint to used.

